



# MASTERColour CDM-Tm Mini PGJ5

## MASTERColour CDM-Tm Mini 35W/930 PGJ5 1CT/12

Mini, single-ended, high-efficiency Ceramic Metal Halide discharge lamp producing crisp white sparkling light

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- For 20W PGJ5 lamp, use only Philips electronic control gear HID PV mini PGJ5 20W
- For 35W PGJ5 lamp, use only Philips electronic control gear HID PV mini PGJ5 35W
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information			
Cap-Base	PGJ5 [ PGJ5]	Luminous Flux (Rated) (Nom)	3000 lm
Operating Position	UNIVERSAL [ Any or Universal (U)]	Color Designation	Warm White (WW)
Life to 5% Failures (Nom)	9000 h	Lumen Maintenance 1000 h (Nom)	85 %
Life To 10% Failures (Nom)	10000 h	Lumen Maintenance 10000 h (Nom)	60 %
Life to 20% Failures (Nom)	11000 h	Lumen Maintenance 2000 h (Nom)	80 %
Life to 50% Failures (Nom)	12000 h	Lumen Maintenance 5000 h (Nom)	70 %
		Chromaticity Coordinate X (Nom)	0.436
		Chromaticity Coordinate Y (Nom)	0.396
		Correlated Color Temperature (Nom)	3000 K
		Luminous Efficacy (rated) (Nom)	77 lm/W
Light Technical			
Color Code	930 [ CCT of 3000K]		

# MASTERCcolour CDM-Tm Mini PGJ5

Color Rendering Index (Min)	88
Color Rendering Index (Nom)	91

## Operating and Electrical

Power (Nom)	39.1 W
Lamp Current Run-Up (Max)	0.7 A
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	104 V
Voltage (Min)	88 V
Voltage (Nom)	96 V

## Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

## Mechanical and Housing

Bulb Finish	Clear
-------------	-------

## Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.74 mg
Energy Consumption kWh/1000 h	43 kWh

## UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.4


## Luminaire Design Requirements

Bulb Temperature (Max)	480 °C
Cap-Base Temperature (Max)	250 °C

## Product Data

Full product code	871150021149115
Order product name	MASTERCcolour CDM-Tm Mini 35W/930 PGJ5 1CT/12
EAN/UPC - Product	8711500211491
Order code	928093905130
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928093905130
Net Weight (Piece)	0.006 kg
ILCOS Code	MT/UB-35/930-H/L-PGJ5-13.3/52

## Dimensional drawing




CDM-Tm 35W/930 PGJ5

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-Tm Mini 35W/930 PGJ5 1CT/12	13.2 mm	0.44 in	4 mm	22.3 mm	22.9 mm	22.6 mm	52 mm

# MASTERCoulour CDM-Tm Mini PGJ5

## Photometric data

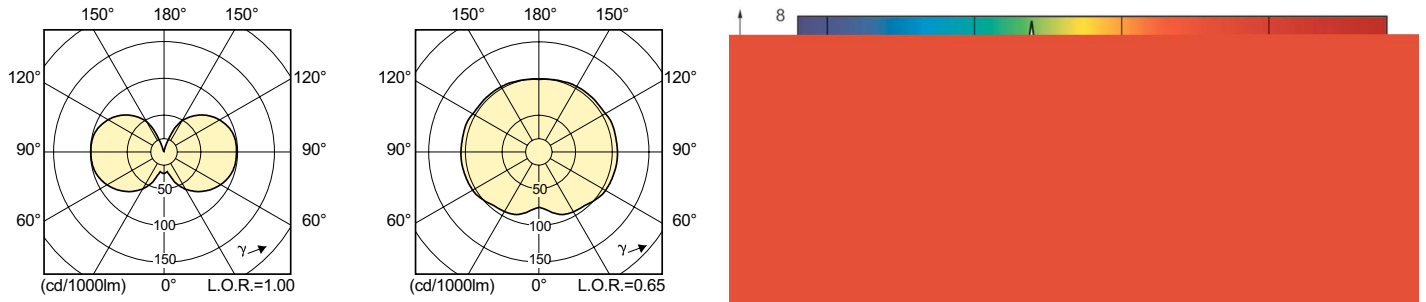

## Lifetime

