



# **MASTER MHN-LA**

## **MASTER MHN-LA 1000W/956 230V XWH**

Compact guartz metal halide lamps with double-pinch

#### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information					
Cap-Base	X528 [ X528]				
Operating Position	P5 [ Parallel +/-5D or Horizontal(HOR)]				
Life to 5% Failures (Nom)	6000 h				
Life To 10% Failures (Nom)	8000 h				
Life to 20% Failures (Nom)	10000 h				
Life to 50% Failures (Nom)	15000 h				
Light Technical					
Color Code	956 [ CCT of 5600K]				
Luminous Flux (Rated) (Min)	82000 lm				
Luminous Flux (Rated) (Nom)	87000 lm				
Color Designation	Daylight				
Lumen Maintenance 1000 h (Nom)	90 %				
Lumen Maintenance 2000 h (Nom)	80 %				
Chromaticity Coordinate X (Nom)	337				
Chromaticity Coordinate Y (Nom)	331				
Correlated Color Temperature (Nom)	5600 K				
Luminous Efficacy (rated) (Nom)	86.0 lm/W				

Color Rendering Index (Nom)	80			
Operating and Electrical				
Lamp supply voltage	230 V [ 230]			
Power (Nom)	1040.0 W			
Lamp Current Run-Up (Max)	15 A			
Lamp Current (EM) (Nom)	9.3 A			
Ignition Supply Voltage (Min)	198 V			
Voltage (Max)	140 V			
Voltage (Min)	110 V			
Voltage (Nom)	125 V			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Bulb Finish	Clear			
Cap-Base Information	Cable			


Datasheet, 2020, March 19 data subject to change

## **MASTER MHN-LA**

Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	95 mg
Energy Consumption kWh/1000 h	1144 kWh
UV	
Specific Eff. Radiant Power	270 mW/klm
Luminaire Design Requirements	
Bulb Temperature (Max)	920 ℃
Pinch Temperature (Max)	350 ℃

Product Data					
Full product code	871150020077800				
Order product name	MASTER MHN-LA 1000W/956 230V XWH				
EAN/UPC - Product	8718291548218				
Order code	928072205130				
Numerator - Quantity Per Pack	1				
Numerator - Packs per outer box	1				
Material Nr. (12NC)	928072205130				
Net Weight (Piece)	132.000 g				
ILCOS Code	MN-1000-E-K-/H				


## Dimensional drawing

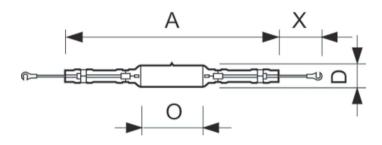

Product	D (max)	0	Х	Α
MASTER MHN-LA 1000W/956 230V	40 mm	40.5 mm	35 mm	286 mm
XWH				

MHN-LA 1000W/956 230V XWH


#### Photometric data

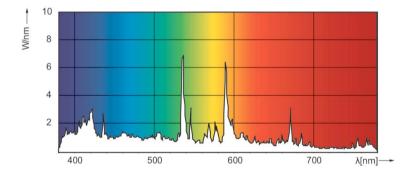


LDPO\_MHN-LA\_0003-Spectral power distribution Colour

## **MASTER MHN-LA**

#### Lifetime

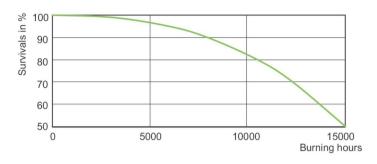

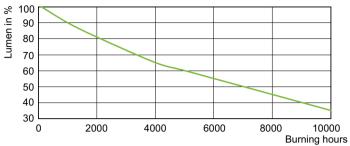

LDLE\_MHN-LA\_0001-Life expectancy diagram

LDLM\_MHN-LA\_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.