



# **MASTER PL-S 2 Pin**

# MASTER PL-S 11W/830/2P 1CT/5X10BOX

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

#### **Warnings and Safety**

- $\cdot$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### Product data

General Information	
Cap-Base	G23 [ G23]
Life To 10% Failures (Nom)	6500 h
Life to 50% Failures (Nom)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	95 %
LSF 8000 h Rated	86 %
Light Technical	
Color Code	830 [ CCT of 3000K]
Luminous Flux (Nom)	900 lm
	<u> </u>

Luminous Flux (Rated) (Nom)	893 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	77 lm/W
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	94 %
LLMF 4000 h Rated	91 %
LLMF 6000 h Rated	89 %
LLMF 8000 h Rated	86 %
Operating and Electrical	
Power (Nom)	11.6 W


Datasheet, 2020, November 18 data subject to change

# **MASTER PL-S 2 Pin**

Lamp Current (Nom)	0.155 A
Temperature	
Design Temperature (Nom)	28 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2 Pins
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg

Francis Communication 1988/h /1000 h	14 kWh
Energy Consumption kWh/1000 h	14 KWII
Product Data	
Full product code	871150026106970
Order product name	MASTER PL-S 11W/830/2P 1CT/5X10BOX
EAN/UPC - Product	8711500261069
Order code	927936483011
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927936483011
Net Weight (Piece)	43.000 g
ILCOS Code	FSD-11/30/1B-I-G23


## Dimensional drawing




PL-S 11W/830/2P LM

# Product D (max) D1 (max) A (max) B (max) C (max) MASTER PL-S 11W/830/2P 28 mm 13 mm 198 mm 214 mm 235.8 mm 1CT/5X10BOX

#### Photometric data

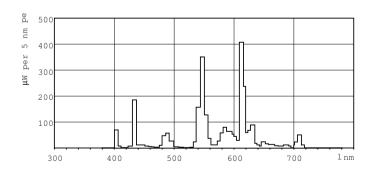


LDPB\_PLS2PLM\_830-Spectral power distribution B/W

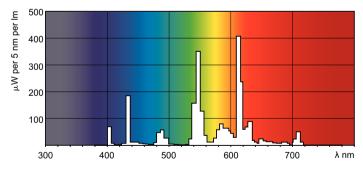

LDPO\_PLS2PLM\_830-Spectral power distribution Colour

### **MASTER PL-S 2 Pin**

#### Lifetime

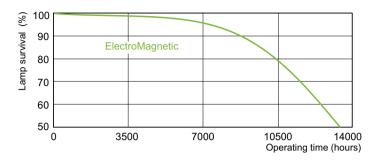



LDLE\_PLS2PLM\_0002-Life expectancy diagram

LDLE\_PLS2PLM\_0001-Life expectancy diagram



LDLM\_PLS2PLM\_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.