PHILIPS Lighting



MASTER PL-S 2 Pin

MASTER PL-S 9W/840/2P 1CT/5X10CC

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

Warnings and Safety

- \cdot Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- \cdot Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


eral Information		Luminous Flux (Rated) (Nom)	583 lm
ap-Base	G23 [G23]	Color Designation	Cool White (CW)
ife To 10% Failures (Nom)	6500 h	Correlated Color Temperature (Nom)	4000 K
ife to 50% Failures (Nom)	10000 h	Luminous Efficacy (rated) (Nom)	67 lm/W
SF 2000 h Rated	99 %	Color Rendering Index (Nom)	82
LSF 4000 h Rated	98 %	LLMF 2000 h Rated	94 %
SF 6000 h Rated	95 %	LLMF 4000 h Rated	91 %
LSF 8000 h Rated	86 %	LLMF 6000 h Rated	89 %
		LLMF 8000 h Rated	86 %
Light Technical			
Color Code	840 [CCT of 4000K]	Operating and Electrical	
Luminous Flux (Nom)	600 lm	Power (Nom)	8.7 W

MASTER PL-S 2 Pin

Lamp Current (Nom)	0.170 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2 Pins
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg

Energy Consumption kWh/1000 h	11 kWh		
Product Data			
Full product code	871150026087170		
Order product name	MASTER PL-S 9W/840/2P 1CT/5X10CC		
EAN/UPC - Product	8711500260871		
Order code	927936084011		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	50		
Material Nr. (12NC)	927936084011		
Net Weight (Piece)	32.000 g		
ILCOS Code	FSD-9/40/1B-I-G23		

Dimensional drawing




PL-S 9W/840/2P LM

Photometric data

 Product
 D (max)
 D (max)
 A (max)
 B (max)
 C (max)

 MASTER PL-S 9W/840/2P 1C7
 28 mm
 13 mm
 129 mm
 145 mm
 167 mm

 SX10CC
 28 mm
 14 mm
 145 mm
 167 mm

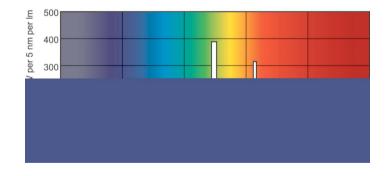


LDPB_PLS2PLM_840-Spectral power distribution B/W


LDPO_PLS2PLM_840-Spectral power distribution Colour

MASTER PL-S 2 Pin

Lifetime

(%) > 100

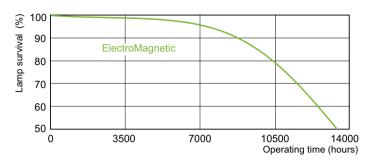

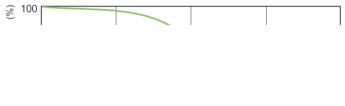

LDLE_PLS2PLM_0001-Life expectancy diagram

LDLM_PLS2PLM_0001-Lumen maintenance diagram

LDLE_PLS2PLM_0002-Life expectancy diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, November 18 - data subject to change